

RXZE2M114M

socket RXZ - mixed contact - 10A - < 250V -
connector - for relay RXM2..., RXM4..



Main

Range of product	Zelio Relay
Commercial Reference	RXZE2M114M
Product or component type	Socket

Complementary

Connections - terminals	Connector , solid cable without cable end 2 x 0.5...2 x 1.5 mm ² /AWG20...AWG16 Connector , flexible cable with cable end 2 x 0.25...2 x 1 mm ² /AWG22...AWG17 Connector , flexible cable with cable end 1 x 0.25...1 x 2.5 mm ² / AWG22...AWG14 Connector , solid cable without cable end 1 x 0.5...1 x 2.5 mm ² /AWG20...AWG14
Marking	CE
Product weight	0.056 kg


Environment

Standards	IEC 61984
Product certifications	CSA UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V
RoHS EUR conformity date	0801
RoHS EUR status	Compliant

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Socket

Socket with Mixed Contact Terminals and Connector

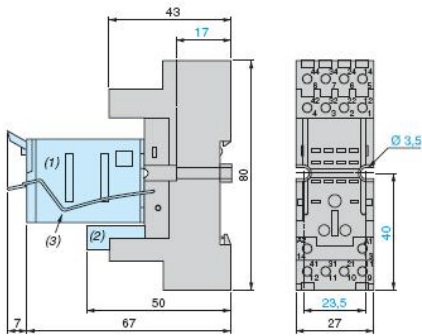

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup